


Cisco 7965 User Guide

Telephone: 020 3056 5060

Flip Solutions Ltd t/a Flip Connect, Unit 5/6, 29 Mill Lane, Welwyn, Hertfordshire, AL6 9EU



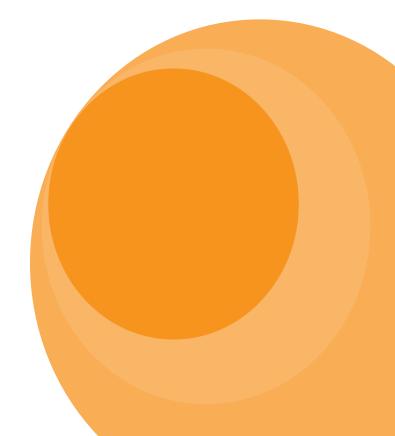

Cisco 7965 IP Endpoint User Guide





- 1 Voicemail / Ringer Indicator
- 2 Monitor
- 3 Display
- 4 Softkeys

- 5 Toggle / Navigation
- 6 Volume Bar
- 7 Dial Pad
- 8 Audio Buttons: ① Headset 🔏 Mute 👊 Speaker





Cisco 7965 IP Endpoint User Guide



Phone Basics	
Changing ring tones	Press the settings button (\bigcirc) then option 1 (\bigcirc) > option 1 (\bigcirc) >
	option 1 (1), then using the toggle button (1) select the tone of your choice.
	Press the Select softkey and then Save softkey to save.
Setting the ring volume	With the handset in its cradle, press the volume bar () up to increase, down to decrease, this will automaticly save.
Setting the speaker volume	Press the <i>speaker button</i> () then press the volume bar () up to increase, down to decrease, press the <i>Save</i> softkey to complete.
Setting the earpiece volume	Lift the handset then press the volume bar () up to increase, down to decrease, press the <i>Save</i> softkey to complete.

Call Control	
Group pickup	To answer another phone that is part of your group, lift the handset and dial
DC pickup	To answer another phone that is NOT part of your group, lift the handset and dial (2) then dial the extension number of the ringing phone.
Place a call on hold	Whilst on a call, press the <i>Hold</i> softkey, the caller will then be on hold, to retrieve the call, press the <i>Resume</i> softkey.
Call Waiting	Whilst on a call, you will be notified of the second caller by a beeping noise through the earpiece and the number will be displayed on the screen. To answer the waiting caller, press the <i>Answer</i> softkey, the first call will then be placed on hold. You can switch between the calls using the toggle button (), highlight the call required and press the <i>Resume</i> softkey to resume the call.
Transferring Calls	To transfer your call, press the <i>More</i> softkey, then the <i>Trnsfer</i> softkey, dial the extension number for internal transfer, or the full CLI to transfer to an external phone number. To complete the transfer, hang up the call. If you need to cancel the transfer and connect the call back to yourself, use the toggle button (), highlight the call and press <i>Resume</i> softkey.



Cisco 7965 IP Endpoint User Guide



Call Forwarding In order to forward all incoming calls another number, press the *Forward* softkey, enter the destination number then the *Forward* softkey to complete. To remove the forward, press *Forward* softkey and then the *Forward* softkey.

Call Conferencing	
Ad-Hoc Conferencing	With your first caller connected, press the <i>More</i> softkey then the <i>Confrn</i> softkey - this will place the first caller on hold. Dial the extension number or full CLI of the second caller. To connect all calls, press the <i>More</i> softkey then the <i>Confrn</i> softkey.

Voicemail		
Voicemail management	To access the portal, press the Voicemail button () You can the Record a greeting by using option 5 ()	
Listening to your voicemails	When you have a voicemail, the voicemail indication light will turn red, to listen to your voicemails, press the Voicemail button () and follow the instructions given through the handset.	
Remote voicemail access	In order to access your voicemail from another phone; If it is an internal phone, you can lift the handset and dial 5 5 then enter your extension number and password following the instructions given through the handset. To access from an external phone, dial your full CLI, wait for the voicemail promt, then press the star key and follow the instructions given.	

Further Support:

If you require further assistance our support pages have lots of ways to help you:

- There is FAQs click here you can then ask questions and have them answered by community members.
- You can raise a support ticket here.
- Our User Guides, here you will find PDFs and interactive video tutorials.

Alternatively you can ring the support helpline on 020 3056 5060.



Copyright © 2011 Flip Connect. All Rights Reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form or by any means without the written permission of Flip Connect.